Vertiv[™] Reference Design

Knowledge to Build Optimized Infrastructure Solutions

Vertiv[™] Integrated Rack Solution

Reference Design #24

ERTIV

Premier Conditioned and Controlled 42U 6 Rack Row 51kVA Capacity

Solution Requirements

Physical Protection:

- Safeguard network gear from environmental threats and unauthorized access.
- Prevent dust, debris, and moisture from damaging equipment.

Power Protection:

- Prevent business interruption caused by power loss or power fluctuations with battery backup technology.
- Achieve maximum uptime with redundant gear protecting critical application during an unexpected equipment failure.

On-Site Management:

- Simplify deployment and support future growth with infrastructure designed for total compatibility and scalability.
- Streamline deployment and get critical applications up and running faster with on-site services and support.

Remote Management

- Maintain peace of mind one or more remote sites are up and running with real-time notifications.
- Save time by remotely accessing and rebooting unresponsive network equipment without an on-site visit.

Site-Maintenance

- Ensure continuity of business with remote access and management of critical systems.
- Maximize your investment with on-site equipment maintenance and extended warranty protection.

Thermal Management

• Cool critical IT gear in high density or high temperature environments.


Form Factor: Row

Objective: Support critical IT applications in data center environments designed specifically for IT equipment.

Recommended Environment

Climate-controlled physically secure environment with power, air conditioning and airflow management in place providing temperature and humidity optimization specifically designed for IT equipment.

- Enterprise Data Center
- Managed Hosting Facility
- Colocation Data Center
- Cloud Data Center

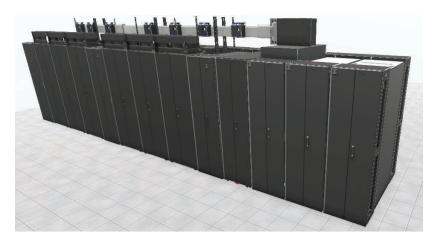

Integrated Solution Summary

÷		
Capacity	51 KVA / 51 KW	
Rack(s)	Qty. 6 - 42U X 800 X 1100 (HXWXD)	
Power Protection	Online Double Conversion	
Redundancy	N+1 Backup Power, 2N Rack Power Distribution, N+1 Cooling	
Power Distribution	208 Volt Three Phase; 30 Amp	
Cooling	20 KW	
Containment	Included	
Monitoring	Included	
Services	Included	
Warranty	3 years	
Software	Included	

Explore all Conditioned and Controlled form factors and power configurations available, Rack, Row, and Site by visiting the Solution Builder on Vertiv.com or by contacting a Vertiv Sales Representative.



Integrated Solution Includes:

Qty:	Product Summary	SKU	Description:
6	Rack	E428100312Y1Z1X E428100A12Y1Z1X	Vertiv™ DCX Rack supports a wide variety of equipment, including servers, storage, switches, routers, PDUs, UPSs, console port servers and KVM switches. Dimensions 42U x 800mm x 1100mm (HxWxD).
6	Cable Management	VRA1003 VRA1004 VRA1005	Cable managment accessories including: Lobster claws, Velco straps, and 1U Horizontal cable manager.
1	Power Distribution (Busway)	MBX25PPNN1 MBX25PPNNENNB MBX25PPNNNBNBNN	The Vertiv™ Liebert® Busway provides power distribution from the UPS system to all 3 racks. This busway provides (3) tapboxes, each with (2) L15-30R that feed (2) UU30009L in each rack.
1	UPS	47SA040CBCM0000 47MBH36CC1R1DCX EEA11PSD01 EED11P0D01	The Vertiv™ Liebert® EXM UPS provides efficient and economical operation with a flexible power system offering scalable and redundant features optimized for midsize IT and critical power applications. This includes a battery and maintenance bypass cabinet.
12	Rack PDU	UU30009L FSC3N002	Vertiv™ Geist™ rPDU, Switched Outlet Level Monitoring EC, Variable Power Configuration, Vertical, (30) Locking IEC C13, (6) Locking IEC C19, Universal Inlet. L15-30P Facility side cable included.
3	Row Based Air Cooling	CR020RA1C7XDFS MCM040E1YDXVR0 301456G15	Vertiv™ Liebert® 20kW CRV row based Air cooling unit, 300mm wide, 208V with MCM040 Condenser 208V including Lee Temp Kit to be used with MCM040 Condenser.
1	Warranty and Service	3WC35KWL 3WP35KWL	The row based cooling system is covered for 3 years and includes 3 years of bi-anunal PMs. Also included is startup on the UPS and maintenance bypass.
1	Warranty and Service	MBSEA131C1BA8X5 MPEXM10-200ES1 MUEXM208-40ES1 SPEXM10-200UM SUEXM10-40UM	The row based UPS sytem is cover for 3 years and includes 3 years of annual PMs. Also included is startup on the UPS and maintenance bypass.
1	Delivery and Installation	vF-D6N1-INSTALL	Vertiv factory trained technicians will consolidate, deliver and install the solution.
1	Software	DSV4.5-BASE DSV4.5-500DEV 1YRSLV-500DEV	DSView delivers secured web-browser enabled sessions of on-network infrastructure controls. As an IT integrated solution, DSView delivers secured web-browser enabled sessions to Virtual Machines.

*Additional accessories and components are required and included in the integrated solution. Contact a Vertiv Partner for the complete bill of materials, to receive pricing, and to purchase.

Recommended Upgrades

Qty:	Product Summary	Model #:	Description:
1	Software	ENVA-SERVER ENVA-DEV-500 ENVA-STUP-500 ENVA-SERVER-SA ENVA-SA-500	Vertiv™ Environet™ Alert provides industry companies with critical facility monitoring software that is affordable and easy to use. This solution delivers superior monitoring, and alerting.

Vertiv.com | Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA

© 2021 Vertiv Group Corp. All rights reserved. Vertiv, and the Vertiv logo trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.