

PRODUCT SPECIFICATION for End Customers

Lithium Ion Battery System for UPS – U6A4

(34.6kWh, 32.6kWh, 28.5kWh, 26.5kWh, 20.4kWh)

Internal Approval

Division	Development	QA	
Signature			
Date			

Customer Approval

I hereby approve the following product of Samsung SDI Co., Ltd. for production.

Product: Li-ion Battery System for UPS

Signature _____

Date _____

Table of Contents

Internal Approval	2
Customer Approval	2
Revision History	3
Table of Contents	4
Tables	5
Figures	6
Acronyms and Abbreviations	7
1. Product Overview	8
1.1 Scope	8
2. Product Description	9
3. Safety Information and Handling	10
3.1 Safety Symbols.....	10
3.2 General Safety Information.....	11
3.2.1 Protective Equipment.....	11
3.2.2 Organic Solvent Electrolyte.....	11
3.2.3 Electrolyte Vent Product.....	11
3.2.4 High Voltage Sources.....	12
3.2.5 Unloading and Unpacking.....	12
3.2.6 Storage.....	12
3.3 General Handling Information.....	13
4. Specification and Characteristics	14
5. Block Diagram and Configuration	18
6. Detail Product Description	19
6.1 Battery Module	19
6.2 BCU	21
6.3 SMPS Assembly.....	24
6.4 Rack Frame	26
7. LED Indication	27
7.1 Battery Status Display.....	27
8. Evaluation	28
9. Packaging and Shipment	29
10. Service, Maintenance and Warranty	30
11.1 Service	30
11.2 Maintenance.....	30
11.3 Warranty	30
Contact Information	31

Tables

Table 1: Acronyms and Abbreviations.....	7
Table 2: Component Information	8
Table 3: Safety Symbols	10
Table 4: Battery System General Specification	14
Table 5: 136S Battery System Specification	15
Table 6: 128S Battery System Specification	15
Table 7: 112S Battery System General Specification	16
Table 8: 104S Battery System General Specification	16
Table 9: 80S Battery System General Specification.....	17
Table 10: Terminal Block Description	23
Table 11: LED Indicator	27
Table 12: Indicated Codes.....	27
Table 13: List of Standards and Regulations.....	28

Figures

Figure 1: 34.6kWh Lithium Ion Energy Storage System.....	9
Figure 2: Storage Guide	13
Figure 3: General System Block Diagram.....	18
Figure 4 : Battery Module Type A.....	19
Figure 5 : Battery Module Type B	20
Figure 6: Cell No. in the Module.....	20
Figure 7: BCU.....	21
Figure 8: Extra Auxiliary Breaker Switch	22
Figure 9: Terminal Block Isometric View.....	22
Figure 10: Terminal Block Front / Top View (Cover Opened/Closed).....	23
Figure 11: SMPS Assembly.....	24
Figure 12: Front View of SMPS Assembly Type A, 3-Phase Input.....	25
Figure 13: Front View of SMPS Assembly Type A, 1-Phase Input.....	25
Figure 14: SMPS Assembly Type A – System BMS Connections.....	25
Figure 15: Front View of SMPS Assembly Type B, 1-Phase Input.....	25
Figure 16: Rack Frame.....	26

Acronyms and Abbreviations

The following acronyms and abbreviations are used in this manual.

Table 1: Acronyms and Abbreviations

Abbreviations	Full Name
BMS	Battery Management System
ESS	Energy Storage System
OCP	Over Current Protection
OTP	Over Temperature Protection
OVP	Over Voltage Protection
SMPS	Switching Mode Power Supply
BCU	Battery Control Unit
SOC	State Of Charge
SOH	State Of Health
UTP	Under Temperature Protection
UVP	Under Voltage Protection
UPS	Uninterruptible Power Supply

1. Product Overview

Customer:

Model Number:

PHR3462-001A (136S), PHR3262-001A (128S), PHR2852-001A (112S), PHR2652-001A (104S), PHR2042-001A (80S)

Product Name: Lithium Ion Battery System for UPS

Supplier: Samsung SDI Co., Ltd.

1.1 Scope

This document details the safety and handling information, characteristics, requirements, installation instructions, operating guidelines, service, maintenance and warranty of Lithium Ion Battery System manufactured by Samsung SDI Co., Ltd. It is intended to provide certified personnel and users with information on safe handling, installation and usage of the specified product. Consult with Samsung SDI if some usages not described are expected.

This product is comprised of the following components.

Table 2: Component Information

Component	Model No.	Note
67Ah Cell	CM0630R0002A	
67Ah 8S1P Battery Module Type A	EM2031AE003A	
67Ah 8S1P Battery Module Type B	EM2031AE004A	
String Management Unit (BCU)	V049-0011AA or V049-0036AA	UL
SMPS Assembly 3 Phase Type A	V044-0006AA	3 Phase AC input, System BMS
SMPS Assembly 3 Phase Type B	SJ94-00238B	3 Phase AC input, no System BMS
SMPS Assembly 1 Phase Type A	V044-0004AA	1 Phase AC input, System BMS
SMPS Assembly 1 Phase Type B	V044-0005AA	1 Phase AC input, no System BMS
Rack Frame	V808-00068A	Black For general customer

2. Product Description

The Battery system consists of four major components: 67Ah 8S1P Battery Module (“Battery Module” hereinafter), Battery Control Unit (BCU) and SMPS Assembly. A single rack configuration of 34.6kWh Battery System is comprised of one BCU and one SMPS Assembly and 17 Battery Modules.

Battery Module is the most basic component of the Battery System and it contains the energy storing battery cells. There is a Module BMS inside each Battery Module. Module BMS checks the status of a Battery Module by measuring its voltage and temperature. It also communicates with the BCU to send all measured voltage and temperature data, and to receive commands to control cell balancing.

BCU collects all information about the battery system and controls the battery system by switching the main power line and controls each Battery Module by cell balancing. BCU calculates the state-of-charge (SOC) and state-of-health (SOH) of the battery system. Key components in the BCU are Rack BMS, MCCB, and shunt resistor. Rack BMS is the main controller that takes all data from the Module BMS, measures the string voltage and current, determines the state of the battery and controls the MCCB accordingly.

SMPS Assembly Type A is comprised of System BMS and switching mode power supply (SMPS). SMPS Assembly Type A supplies power to the BMS and communicates with Uninterruptible Power Supply (UPS). SMPS Assembly Type B is comprised of only SMPS which supplies power to the BMS.

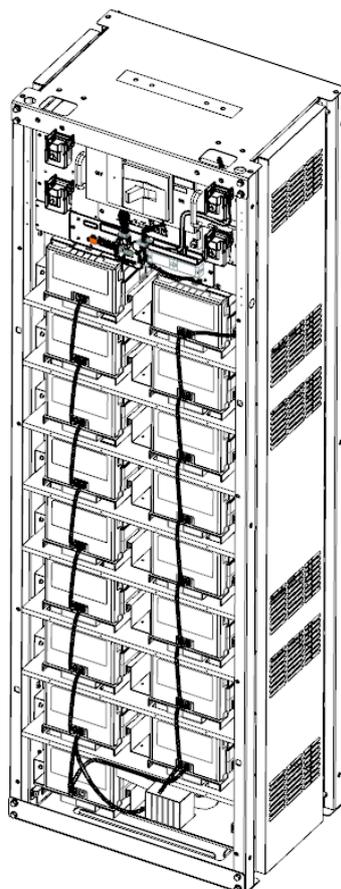


Figure 1: 34.6kWh Lithium Ion Energy Storage System

3. Safety Information and Handling

This Part details the safety information that personnel must fully understand and follow while transporting, storing, installing, operating or servicing the Battery System. Before proceeding with unloading, unpacking, handling, installation and operation, read the following details.

3.1 Safety Symbols

Table 3: Safety Symbols

 DANGER	<p>DANGER 'DANGER' indicates a hazardous situation which will result in death or serious injury if not avoided.</p>
 WARNING	<p>WARNING 'WARNING' indicates a hazardous situation which could result in death or serious injury if not avoided.</p>
 CAUTION	<p>CAUTION 'CAUTION' indicates a hazardous situation which could result in minor or moderate injury if not avoided.</p>
 NOTICE	<p>NOTICE 'NOTICE' indicates a hazardous situation which could result in property damage if not avoided.</p>
	<p>Energy Storage Device To help avoid burns or electric shock : - Service by qualified personnel only - Disconnect main power before maintenance - Turn off the Battery System before maintenance</p>
	<p>Electric shock hazard Do not remove cover or disassemble.</p>
	<p>Explosive gas Do not expose to flame, incinerate, puncture, or impact</p>
	<p>Shield eyes Wear safety goggles at ALL times. (Installation, maintenance, etc.)</p>
	<p>Electrolyte hazard Do not contact eyes, skin or clothing. If it happens, Flush with water and seek medical aid immediately.</p>
	<p>Do not dispose in trash Transport legally. Follow manufacturer's instructions for disposal. Please recycle Lithium ion battery. Do not discard.</p>

	<p>Qualified technicians use this manual for service and replacement.</p>
	<p>This symbol is attached to the position near the DC+, DC- and communication port. If the user wants to access to the points near this symbol, he has to be fully aware of the contents in this manual.</p>
	<p>This symbol is near to the point for grounding. Wire for grounding has to be connected to the point with this symbol.</p>

3.2 General Safety Information

The Battery System provides a safe source of electrical energy when operated as intended and as designed. Potentially hazardous circumstances such as excessive heat or electrolyte mist may occur under improper operating conditions, damage, misuse and/or abuse. The following safety precautions and the warning messages described in this Part must be observed.

If any of the following precautions are not fully understood, or if you have any questions, contact Customer Support for guidance. The Safety Part may not include all regulations for your locale; personnel working with the Battery System must review applicable federal, state and local regulations as well as the industry standards regarding this product.

3.2.1 Protective Equipment

When working with the Battery System, the following personal protective equipment must be worn:

- High voltage rated rubber gloves
- Safety goggles or other eye protection

3.2.2 Organic Solvent Electrolyte

Cell components of the Battery System contain organic solvent-based electrolyte. Breach of individual cells may allow some electrolyte to be released from the cell. Direct contact with the liquid electrolyte can cause skin irritation.

If contact with the liquid electrolyte occurs, follow the suggestions below to minimize the chance of injury:

- Flush eyes immediately with cold running water for at least 15 minutes.
- Rinse skin immediately with water for at least 15 minutes.
- Remove clothing if soiled.
- Seek immediate medical attention.

3.2.3 Electrolyte Vent Product

The Lithium-Ion chemistry used in the Battery System contains an organic solvent-based electrolyte. If the

Battery System is misused, damaged or abused, internal cell pressure may increase to excessive levels. Each cell within the Battery System is equipped with a non-resettable vent so that if internal cell pressure increases, the cell's vent will activate releasing the electrolyte vent products. When operated as intended and designed, internal cell pressure remains stable and no electrolyte product venting occurs. Other structure (rack, enclosure e.g.) must not interfere gas vent.

Organic solvent electrolyte vent products are flammable. To avoid serious injury from the release and ignition of flammable products, the following guidelines must be observed:

- Operate the Battery System under conditions only as specified in this manual.
- Keep sparks, flames and smoking materials away from the Battery System.
- Do not incinerate, puncture or impact the Battery System.
- Do not solder or weld to the Battery System.

3.2.4 High Voltage Sources



DANGER: HIGH VOLTAGE – ELECTRIC SHOCK HAZARD. The Battery System contains high voltage electric shock sources. Do NOT open any cover of Battery Module, BCU and SMPS Assembly.

DANGER Exposure to high voltage can cause serious electrical burns, shock or death. To avoid high voltage electrical shock, follow the guidelines below:

- Do not work with high voltages unless you are qualified personnel.
- Personnel must fully understand the safety precautions associated with working on high voltage circuits.
- Personnel must fully understand the risk of working with batteries, and be prepared and equipped to take the necessary safety precautions.
- Necessary equipment, including but not limited to insulated tools, high voltage rated rubber gloves, rubber aprons, safety goggles, and face protection must be used.
- Ensure that the system is powered off and disconnected from outside circuits before servicing the unit.

3.2.5 Unloading and Unpacking

Carefully remove the plastic cover from the pallet. The packages are situated on a pallet on which it can be transported via forklift from location to location.

A damaged box or rattles during transport may indicate rough handling. Make a descriptive notation on the delivery receipt before signing. If damage is found, request an inspection by the carrier and file a damage claim. Pay particular attention to a damaged crate or staining from electrolyte or other fluids. Delay in notifying carrier may result in the loss of reimbursement for damages.

3.2.6 Storage

Follow the guidelines below when storing the Battery Modules.

- The battery module box should be upright as in Fig. 1 below. Do not stack or place upside down when storing the battery module box.

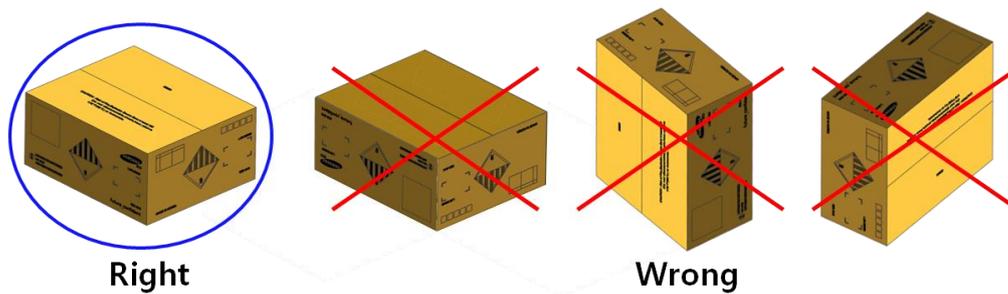


Figure 2: Storage Guide

- Do not stack more than five Battery Module boxes.
- Storage temperature must be in the range of 0 to 40°C.
- Storage humidity is recommended to be less than 60% RH under noncondensing.
- Capacity degradation will occur depending on storage time.

To minimize capacity degradation, storage temperature of less than 10°C and 3.630V per cell is recommended.

3.3 General Handling Information

Follow the guidelines below when handling the Battery System.

- Do not short circuit the positive (+) and negative (-) terminals with metallic object intentionally.
- Do not remove insulation cap on the terminals. If insulation cap is removed, avoid contacting between the metals and the battery terminals. Do not damage the screw thread.
- Do not use seriously scarred or deformed battery. Dispose them immediately according to proper regulations.
- Do not damage sheath of cable and connectors.

4. Specification and Characteristics

Table 4: Battery System General Specification

No.	Item	Specification	Remarks	
1	Dimension [mm, (inch)]	BCU	583 x 359.6 x 235.6, (22.95 x 14.16 x 9.28)	
		Battery Module	403.5 x 214 x 163, (15.89 x 8.43 x 6.42)	Type A and Type B
		SMPS Assembly 3 phase	397.4 x 355.6 x 85.5, (15.64 x 14 x 3.37)	Type A and Type B
		SMPS Assembly 1 phase	397.4 x 355.6 x 85.5, (15.64 x 14 x 3.37)	Type A and Type B
		Rack Frame	650 x 530 x 2055 (25.59 x 20.87 x 80.91)	
2	Weight [kg,(lb)]	BCU	About 18, (40)	
		Battery Module	About 16.5, (36)	Type A and Type B
		SMPS Assembly	About 5, (11)	Type A and Type B
		Rack Frame	About 163.4, (360)	
		136S Battery System	About 510, (1124)	
		128S Battery System	About 493, (1087)	
		112S Battery System	About 459, (1012)	
		104S Battery System	About 442, (974)	
80S Battery System	About 391, (862)			
3	Minimum Capacity	67Ah	1/3C (22.3A) charge and discharge @25°C	
4	Recommended Operation Temperature	23±5°C		
5	Recommended Operation Humidity	Less than 60% RH	Noncondensing	
6	Maximum Operating Altitude	2,000m above sea level		
7	Storage Temperature	Refer the Operation and Maintenance Manual		
8	Storage Humidity	Refer the Operation and Maintenance Manual		
9	Recommended Storage Period	Less than 6 months		
10	Communication (Internal)	Differential UART, 2 Mbps	BCU – Battery Module	
11	Communication (External)1	RS485	UPS – SMPS Assembly No Support Multi-drop Communication	
	Communication (External)2	TCP/IP	UPS – SMPS Assembly	
	Communication (External)3	Dry contact	UPS – SMPS Assembly	
12	IP Rating	IP20		
13	Protective Class	I		

Table 5: 136S Battery System Specification

No.	Item	Specification	Remarks
1	Number of Module	17	8 Type A 9 Type B
2	Nominal Capacity	34.6kWh	1/3C @25°C
3	Nominal Voltage ¹	516.8V DC	3.8V/cell
4	Maximum Voltage ¹	571.2V DC	4.2V/cell
5	Discharging Method #1	Constant Power	
	Discharging Method #2	Constant Current	Max 450A
	End of Discharge Voltage ¹	408V DC	3.0V/cell
	Recommended End of Discharge Voltage ¹	435.2V DC	3.2V/cell
	Standard Discharging Current ¹	22.3A	1/3C @25°C
	Rated Continuous Discharge Power ¹	183.6kW(CP mode)	Peak 450A @ EODV
6	Charging Method	CC-CV, Floating	
	Floating Charging Voltage ¹	571.2V DC	4.2V/cell
	Standard Charging Current ¹	22.3A	1/3C
	Maximum Peak Charging Current ¹	250A	2 second pulse
	Maximum Continuous Charging Current ¹	67A	1C

¹ Specified voltage and current must be satisfied in all load and charging conditions.



Notice: After a full discharge at maximum continuous discharge power, cool the battery for at least 12 hours before another discharge in order to avoid over-temperature protection. Immediate recharging is allowed with standard charging current. For optimal performance, wait until the battery temperature returns to at least ±3°C within the room temperature. (Ex, for using maximum current discharging after maximum current charging(1C), cool the battery for at least 12hours after charging in order to avoid over-temperature protection)

Table 6: 128S Battery System Specification

No.	Item	Specification	Remarks
1	Number of Module	16	8 Type A 8 Type B
2	Nominal Capacity	32.6kWh	1/3C@R.T
3	Nominal Voltage ¹	486.4V DC	3.8V/cell
4	Maximum Voltage ¹	537.6V DC	4.2V/cell
5	Discharging Method #1	Constant Power	
	Discharging Method #2	Constant Current	Max 450A
	End of Discharge Voltage ¹	384V DC	3.0V/cell
	Recommended End of Discharge Voltage ¹	409.6V DC	3.2V/cell
	Standard Discharging Current ¹	22.3A	1/3C@R.T
	Rated Continuous Discharge Power ¹	173kW(CP mode)	Peak 450A @ EODV
6	Charging Method	CC-CV, Floating	
	Floating Charging Voltage ¹	537.6V DC	4.2V/cell
	Standard Charging Current ¹	22.3A	1/3C
	Maximum Peak Charging Current ¹	250A	2 second pulse
	Maximum Continuous Charging Current ¹	67A	1C

¹ Specified voltage and current must be satisfied in all load and charging conditions.



Notice: After a full discharge at maximum continuous discharge power, cool the battery for at least 12 hours before another discharge in order to avoid over-temperature protection. Immediate recharging is allowed with standard charging current. For optimal performance, wait until the battery temperature returns to at least ±3°C within the room temperature. (Ex, for using maximum current discharging after maximum current charging(1C), cool the battery for at least 12hours after charging in order to avoid over-temperature protection)

Table 7: 112S Battery System General Specification

No.	Item	Specification	Remarks
1	Number of Module	14	6 Type A 8 Type B
2	Nominal Capacity	28.5kWh	1/3C@R.T
3	Nominal Voltage ¹	425.6V DC	3.8V/cell
4	Maximum Voltage ¹	470.4V DC	4.2V/cell
5	Discharging Method #1	Constant Power	
	Discharging Method #2	Constant Current	Max 450A
	End of Discharge Voltage ¹	336V DC	3.0V/cell
	Recommended End of Discharge Voltage ¹	358.4V DC	3.2V/cell
	Standard Discharging Current ¹	22.3A	1/3C@R.T
	Rated Continuous Discharge Power ¹	151kW(CP mode)	Peak 450A @ EODV
6	Charging Method	CC-CV, Floating	
	Floating Charging Voltage ¹	470.4V DC	4.2V/cell
	Standard Charging Current ¹	22.3A	1/3C
	Maximum Peak Charging Current ¹	250A	2 second pulse
	Maximum Continuous Charging Current ¹	67A	1C

¹ Specified voltage and current must be satisfied in all load and charging conditions.



Notice: After a full discharge at maximum continuous discharge power, cool the battery for at least 12 hours before another discharge in order to avoid over-temperature protection. Immediate recharging is allowed with standard charging current. For optimal performance, wait until the battery temperature returns to at least $\pm 3^{\circ}\text{C}$ within the room temperature. (Ex, for using maximum current discharging after maximum current charging(1C), cool the battery for at least 12hours after charging in order to avoid over-temperature protection)

Table 8: 104S Battery System General Specification

No.	Item	Specification	Remarks
1	Number of Module	13	6 Type A 7 Type B
2	Nominal Capacity	26.5kWh	1/3C@R.T
3	Nominal Voltage ¹	395.2V DC	3.8V/cell
4	Maximum Voltage ¹	436.8V DC	4.2V/cell
5	Discharging Method #1	Constant Power	
	Discharging Method #2	Constant Current	Max 450A
	End of Discharge Voltage ¹	312V DC	3.0V/cell
	Recommended End of Discharge Voltage ¹	332.8V DC	3.2V/cell
	Standard Discharging Current ¹	22.3A	1/3C@R.T
	Rated Continuous Discharge Power ¹	140kW(CP mode)	Peak 450A @ EODV
6	Charging Method	CC-CV, Floating	
	Floating Charging Voltage ¹	436.8V DC	4.2V/cell
	Standard Charging Current ¹	22.3A	1/3C
	Maximum Peak Charging Current ¹	250A	2 second pulse
	Maximum Continuous Charging Current ¹	67A	1C

¹ Specified voltage and current must be satisfied in all load and charging conditions.



Notice: After a full discharge at maximum continuous discharge power, cool the battery for at least 12 hours before another discharge in order to avoid over-temperature protection. Immediate recharging is allowed with standard charging current. For optimal performance, wait until the battery temperature returns to at least $\pm 3^{\circ}\text{C}$ within the room temperature. (Ex, for using maximum current discharging after maximum current charging(1C), cool the battery for at least 12hours after charging in order to avoid over-temperature protection)

Table 9: 80S Battery System General Specification

No.	Item	Specification	Remarks
1	Number of Module	10	4 Type A 6 Type B
2	Nominal Capacity	20.4kWh	1/3C@R.T
3	Nominal Voltage ¹	304V DC	3.8V/cell
4	Maximum Voltage ¹	336V DC	4.2V/cell
5	Discharging Method #1	Constant Power	
	Discharging Method #2	Constant Current	Max 450A
	End of Discharge Voltage ¹	240V DC	3.0V/cell
	Recommended End of Discharge Voltage ¹	256V DC	3.2V/cell
	Standard Discharging Current ¹	22.3A	1/3C@R.T
	Rated Continuous Discharge Power ¹	108kW(CP mode)	Peak 450A @ EODV
6	Charging Method	CC-CV, Floating	
	Floating Charging Voltage ¹	336V DC	4.2V/cell
	Standard Charging Current ¹	22.3A	1/3C
	Maximum Peak Charging Current ¹	250A	2 second pulse
	Maximum Continuous Charging Current ¹	67A	1C

¹ Specified voltage and current must be satisfied in all load and charging conditions.



Notice: After a full discharge at maximum continuous discharge power, cool the battery for at least 12 hours before another discharge in order to avoid over-temperature protection. Immediate recharging is allowed with standard charging current. For optimal performance, wait until the battery temperature returns to at least $\pm 3^{\circ}\text{C}$ within the room temperature. (Ex, for using maximum current discharging after maximum current charging(1C), cool the battery for at least 12hours after charging in order to avoid over-temperature protection)

5. Block Diagram and Configuration

A single rack system consists of 1 BCU, 1 SMPS Assembly and Battery Modules ranging from 10 modules (20.4kWh) to 17 modules (34.6kWh).

Refer to Figure 3: General System Block Diagram.

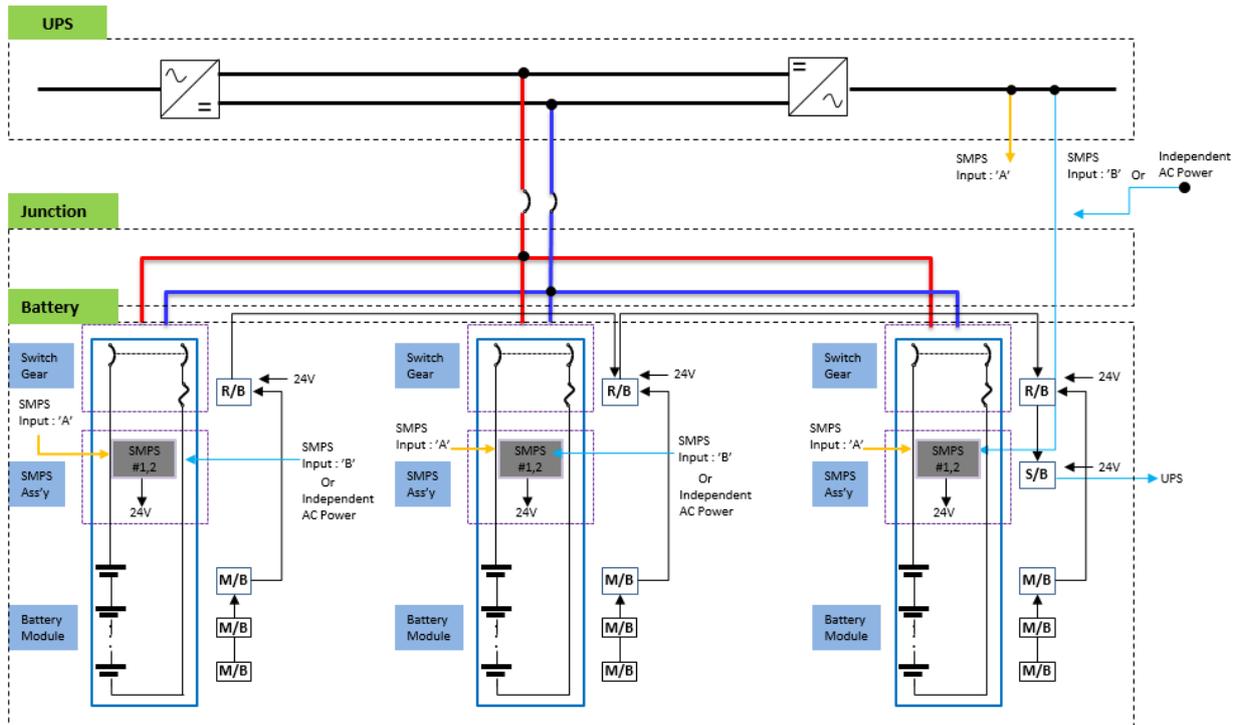


Figure 3: General System Block Diagram

6. Detail Product Description

6.1 Battery Module

Type A: EM2031AE003A

Type B: EM2031AE004A

There are two types of 8S1P Battery Module depending on the position of terminal's polarity. Type A's plus(+) terminal is on the right side. Type B is on the left.

- Nominal capacity: 67 Ah
- Nominal voltage: 30.40 V

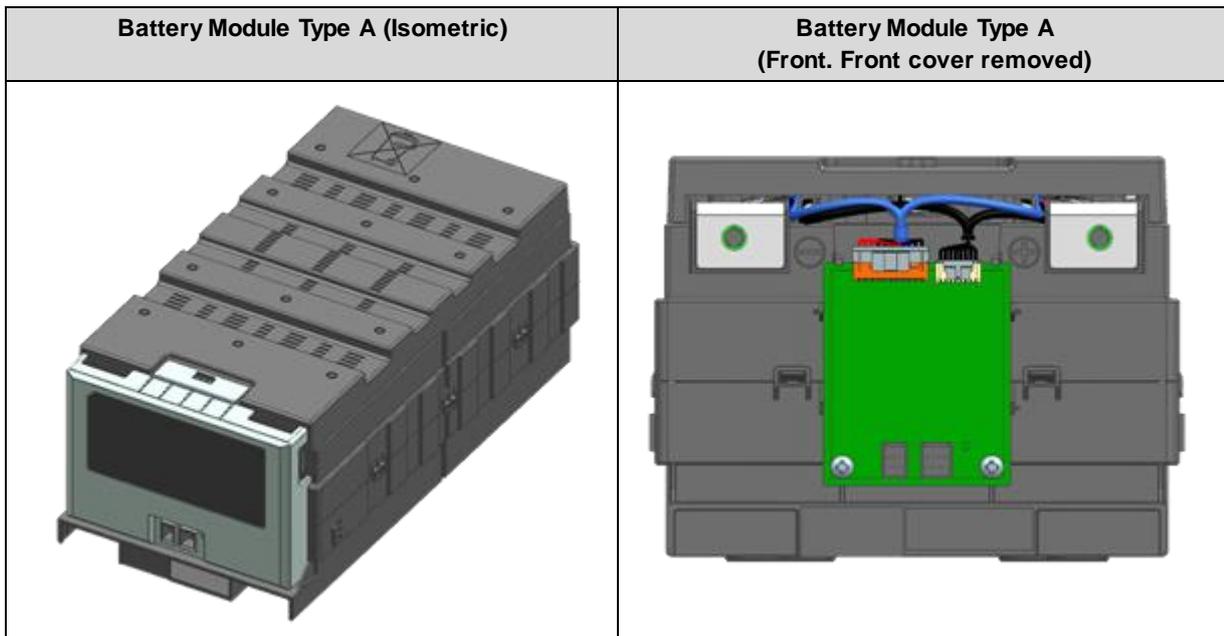


Figure 4 : Battery Module Type A

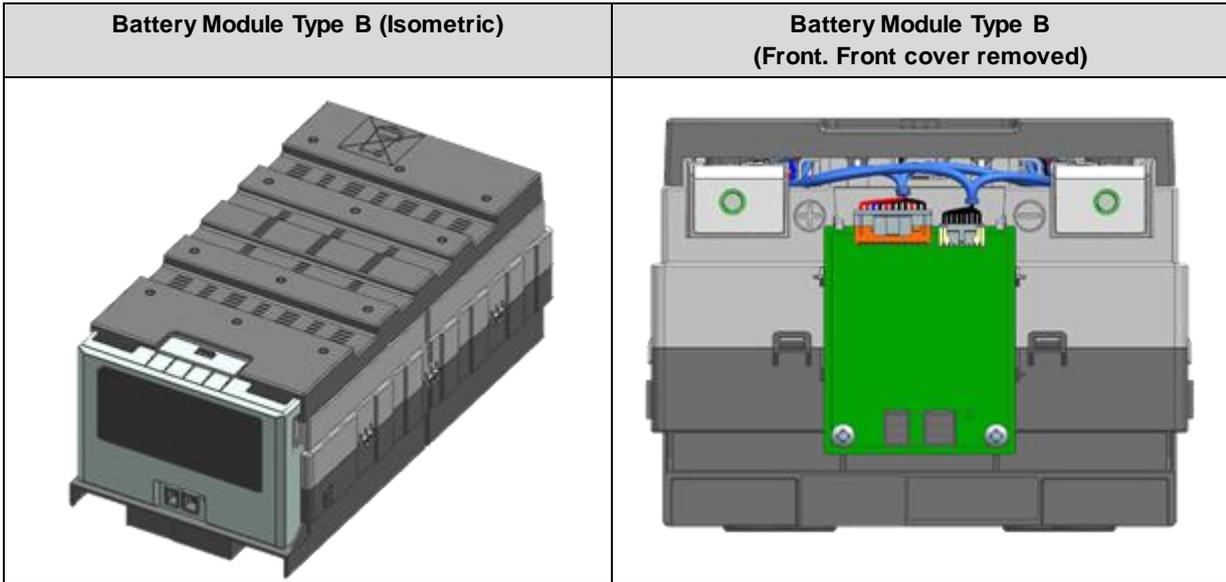


Figure 5 : Battery Module Type B

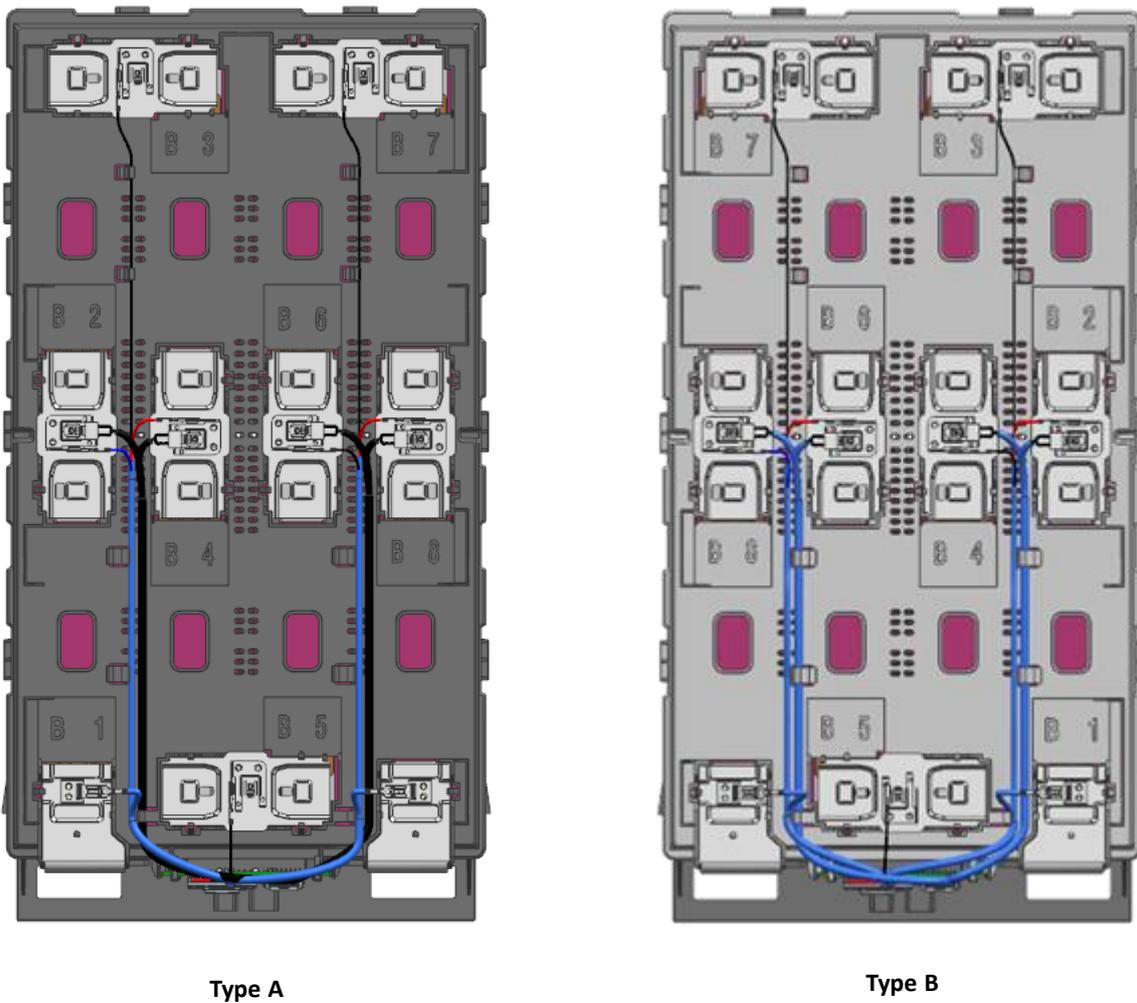


Figure 6: Cell No. in the Module

6.2 BCU

UL: V049-0011AA or V049-0036AA

The BCU consists of protection devices and a rack BMS. The key component of protection devices are as follows

- Fuse: 500A rating
- MCCB UL/CE: 600A rating

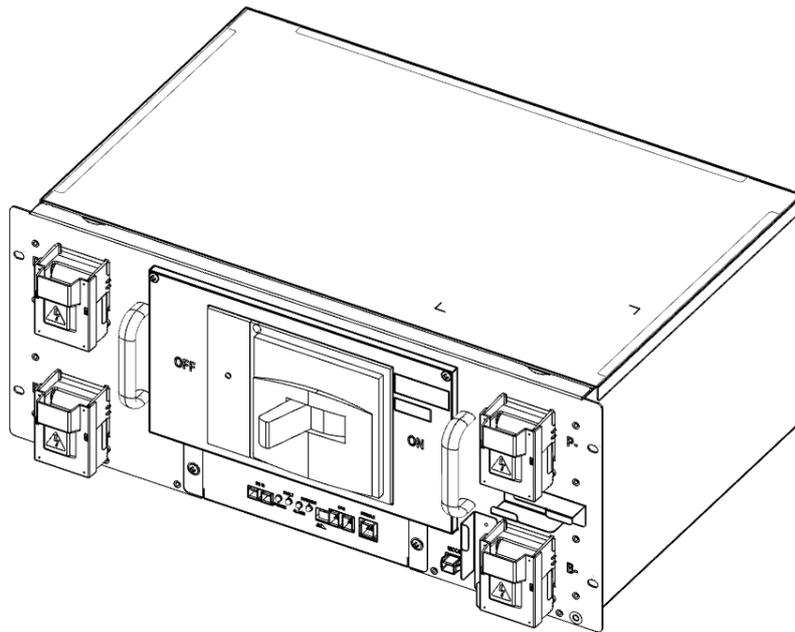


Figure 7: BCU

The BCU provides an extra auxiliary breaker switch that can be externally used for the building monitoring system.

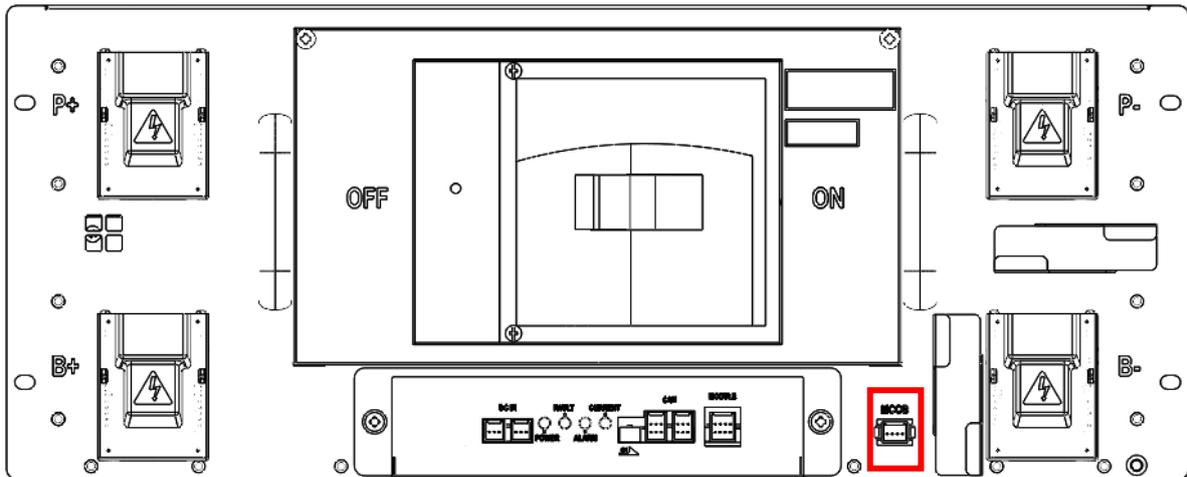


Figure 8: Extra Auxiliary Breaker Switch

P+ and P- terminal blocks connect to the DC link from the UPS. Cable and lug terminals should be selected accordingly with the conductive piece of the terminal block's size and material.



Figure 9: Terminal Block Isometric View

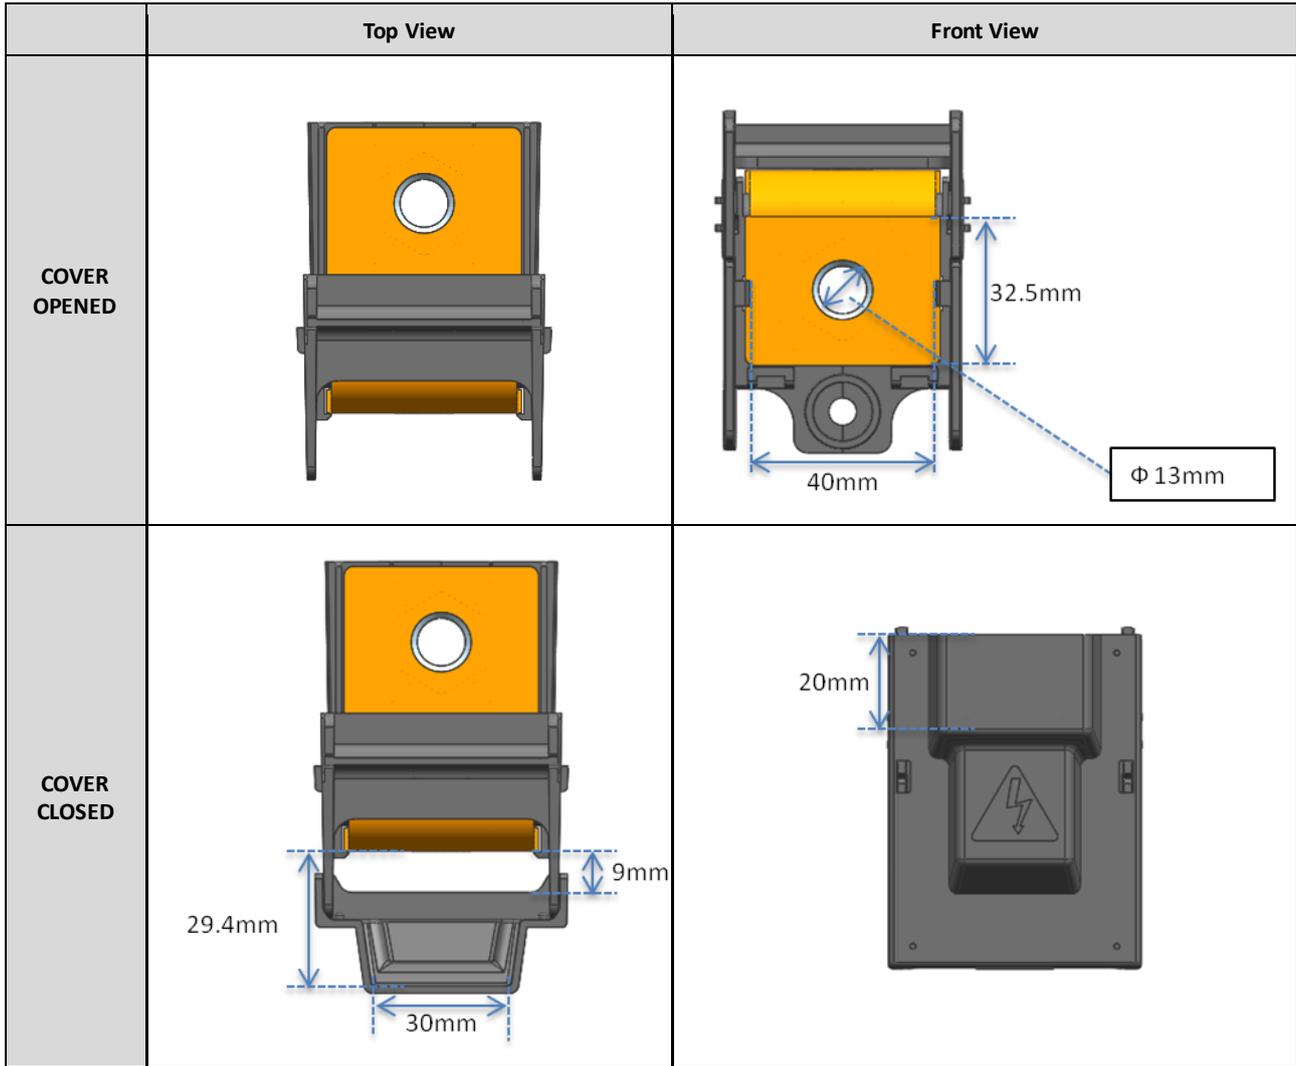


Figure 10: Terminal Block Front / Top View (Cover Opened/Closed)

Table 10: Terminal Block Description

Item	Detail	Description
Conducting Material	Cu	C1100
Insulating Material (Guide)	PA66	GF25%
Insulating Material (Cover)	PC	
Conductive Area	32.5mm x 40.0mm	
Rated Current	473A	Calculated in accordance with DIN 43670 MELSON & BOTH equation

6.3 SMPS Assembly

- 3 Phase Type A (with System BMS): V044-0006AA
- 3 Phase Type B (without System BMS): SJ94-00238B
- 1 Phase Type A (with System BMS): V044-0004AA
- 1 Phase Type B (without System BMS): V044-0005AA

SMPS Assembly houses the System BMS and SMPS, which provides power to the System BMS and BCU. Two options are available for the SMPS depending on the AC input range and cabling: 3 phase and 1 phase. The System BMS assembly provides data to the external systems (i.e. building management system, UPS, etc.) while controlling and monitoring all connected Rack BMS.

There are two types of SMPS Assembly: Type A is with System BMS and Type B is without System BMS.

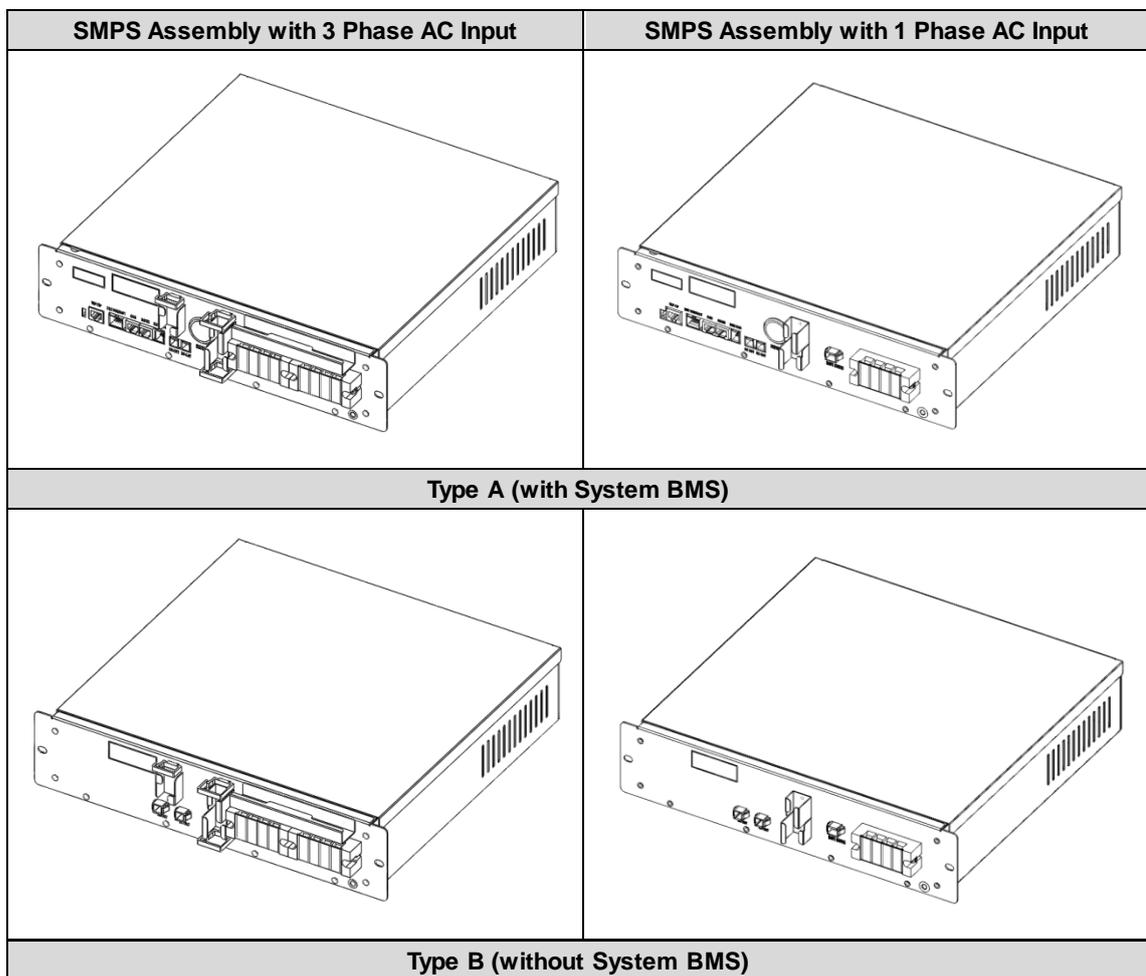


Figure 11: SMPS Assembly

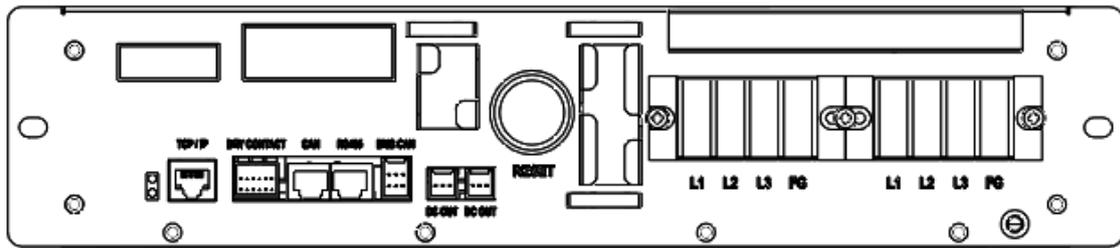


Figure 12: Front View of SMPS Assembly Type A, 3-Phase Input

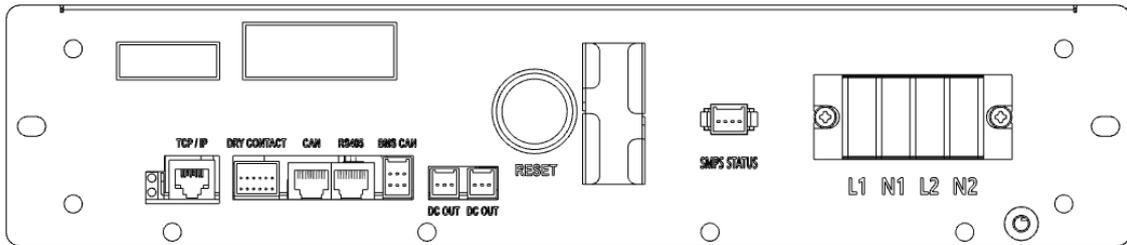


Figure 13: Front View of SMPS Assembly Type A, 1-Phase Input

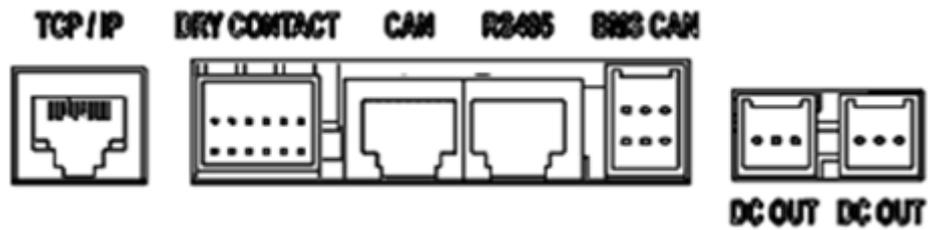


Figure 14: SMPS Assembly Type A – System BMS Connections

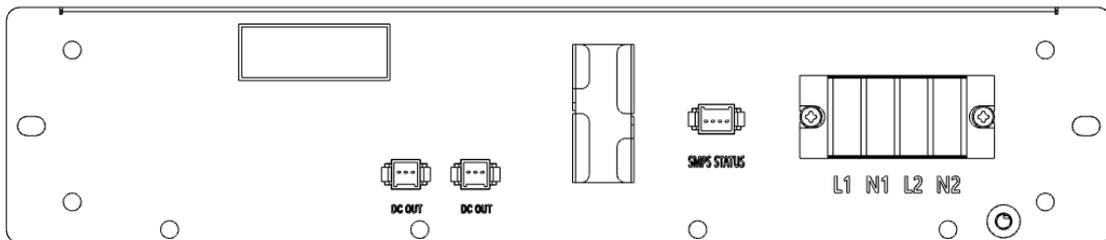


Figure 15: Front View of SMPS Assembly Type B, 1-Phase Input

6.4 Rack Frame

Black: V808-00068A

The Rack Frame is used to mount the modules, BCU and SMPS Assembly and provides ground connections for BCU and SMPS Assembly.

(Grounding cable/bus bar for the rack frame is necessary for the BCU and SMPS assembly as they are grounded to the rack frame when installed.)

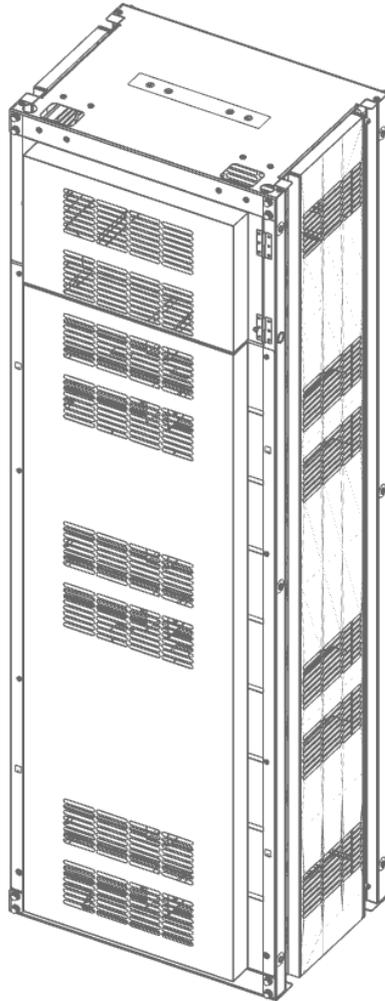


Figure 16: Rack Frame

7. LED Indication

LED indicator in front of the BCU shows the status of the battery.

7.1 Battery Status Display

The LED shows several battery conditions.

Table 11: LED Indicator

Items	POWER(Green)	FAULT(Red)	ALARM(Yellow)	CURRENT(Green)
Location				
Status	On : MCCB Off Off : Power Off Blink : MCCB On	On : N/A Off : Power Off Blink : Major Protection	On : N/A Off : Power Off Blink : Minor Protection	On : Discharge Off : Idle Blink : Charge

Table 12: Indicated Codes

LED Status	Battery Status	Remarks
<p>POWER steady</p>	Normal status	MCCB Off
<p>POWER blinking</p>	Normal status	MCCB On
<p>POWER blinking CURRENT steady</p>	Normal Status	Discharge
<p>POWER blinking CURRENT blinking</p>	Normal Status	Charge
<p>POWER steady FAULT blinking</p>	Major Protection MCCB tripped	
<p>POWER blinking ALARM blinking</p>	Minor Protection MCCB on	

8. Evaluation

This part lists all regulation and safety tests conducted by Samsung SDI or a third-party organization. Refer to additional report for more information on test specification.

Table 13: List of Standards and Regulations

No.	Regulation	Tested Product	Result
1	UL1642	Cell	OK
2	UN38.3	Cell, 8S1P Module	OK
3	UL1973, UL991, UL1998	8S1P Module, System	OK
4	CE (IEC 62477-1, EN 61000), IEC 62619	8S1P Module, System	OK

※ Other evaluations are based on customer requirements or Samsung SDI's standards.

9. Packaging and Shipment

The Battery System is packaged in groups of each component. Refer to additional specification document on packaging and shipment details.

10. Service, Maintenance and Warranty

11.1 Service

There are no user serviceable parts in the Battery Module, BCU and SMPS Assembly. Written authorization from Samsung SDI is required to open the Battery Module, BCU and SMPS assembly or perform any maintenance thereon. For service inquiries and questions please contact Samsung SDI.

11.2 Maintenance

The Battery System is designed to be free of maintenance when the recommended operating parameters are followed.

11.3 Warranty

Do not disassemble the Battery Modules, BCU and SMPS Assembly as doing so presents a safety hazard and will void the warranty. Contact Samsung SDI for more information. Refer to the purchase agreement for warranty details.

Contact Information

Corporate Headquarters

Samsung SDI, Co. Ltd.
150-20, Gongse-ro, Giheung-gu, Yongin-si, Gyeonggi-do
Republic of Korea
Telephone: 82-31-8006-3336
Homepage: www.samsungsdi.com